

City of Hot Springs, Arkansas

Quote Form				
Description				
PROVIDE MATERIALS AND LABOR BUILD A 10' X 12' OFFICE UPSTAIRS AT THE WASTEWATER PLANT 320 DAVIDSON DRIVE, HOT SPRINGS, AR				
Specifications (if not attached)				
EMAIL QUOTES TO MBURKS@CITYHS.NET or FAX 501-321-6833				
PHONE 501-321-6830 – SUBMIT QUOTES NO LATER THAN 5:00 PM, FRIDAY, AUGUST 07, 2020				
Pages to be returned with bid (in order for bid not to be rejected)				
Pricing	Description	Quantity	Unit Price	Extended Price
Item 1	OFFICE	1		
Item 2				
Item 3				
Item 4				
Item 5				
Total (use this line if there is a separate cost sheet)				
Freight/Delivery (must be shown separately)				XXXXXXXXXXXXXXXXXXXX
Bid Total				
Number of 12-month extensions (see bid for conditions):				
<p>Taxes - Taxable goods and services delivered inside the City of Hot Springs will have a tax rate of 9.5%. This should not be included in the totals above. All other goods and services will be taxed at the rate required by the applicable governing bodies.</p>				
Guaranteed Date of Delivery (if applicable):				
Execution of Bid (to be completed by bidder)				
<p>Upon signing this bid, I/we have read and agree to the requirements set forth in this bid request and proposal including specifications, instructions to bidders, terms and conditions of bidding, terms and conditions of purchase and pertinent information regarding this bid, and agree to furnish the requested items at the price stated above. UNSIGNED BIDS WILL BE REJECTED.</p>				
Name of Bidder		Phone Number		
Street/PO Address				
City, State, ZIP		Fax Number		
Email Address				
Signature		AR Tax Permit#		
Printed Name				
Title		State Contractor License #		
Do you have a City of Hot Springs business license?			YES	NO

QUOTE SPECIFICATIONS
FOR
OFFICE AREA

Provide labor and materials to build a 10 ft. x 12' area upstairs at the Wastewater Plant, 320 Davidson Drive, Hot Springs, AR.

Frame and finish walls. Interior walls shall be drywall and painted. Department will choose color.

Install 36" x 80" wood frame and door.

Walls shall be insulated with R-13 insulation.


4" Rubber base trim

Floor to be glued down commercial grade vinyl planks, color chosen by department.

Move one (1) vent and add one (1) vent to HVAC system

Install at the minimum of 2 electrical outlets.

To schedule a walk through to view the work area contact Ronnie Latsos 501-538-7631 or Chuck Hillison 501-545-3619

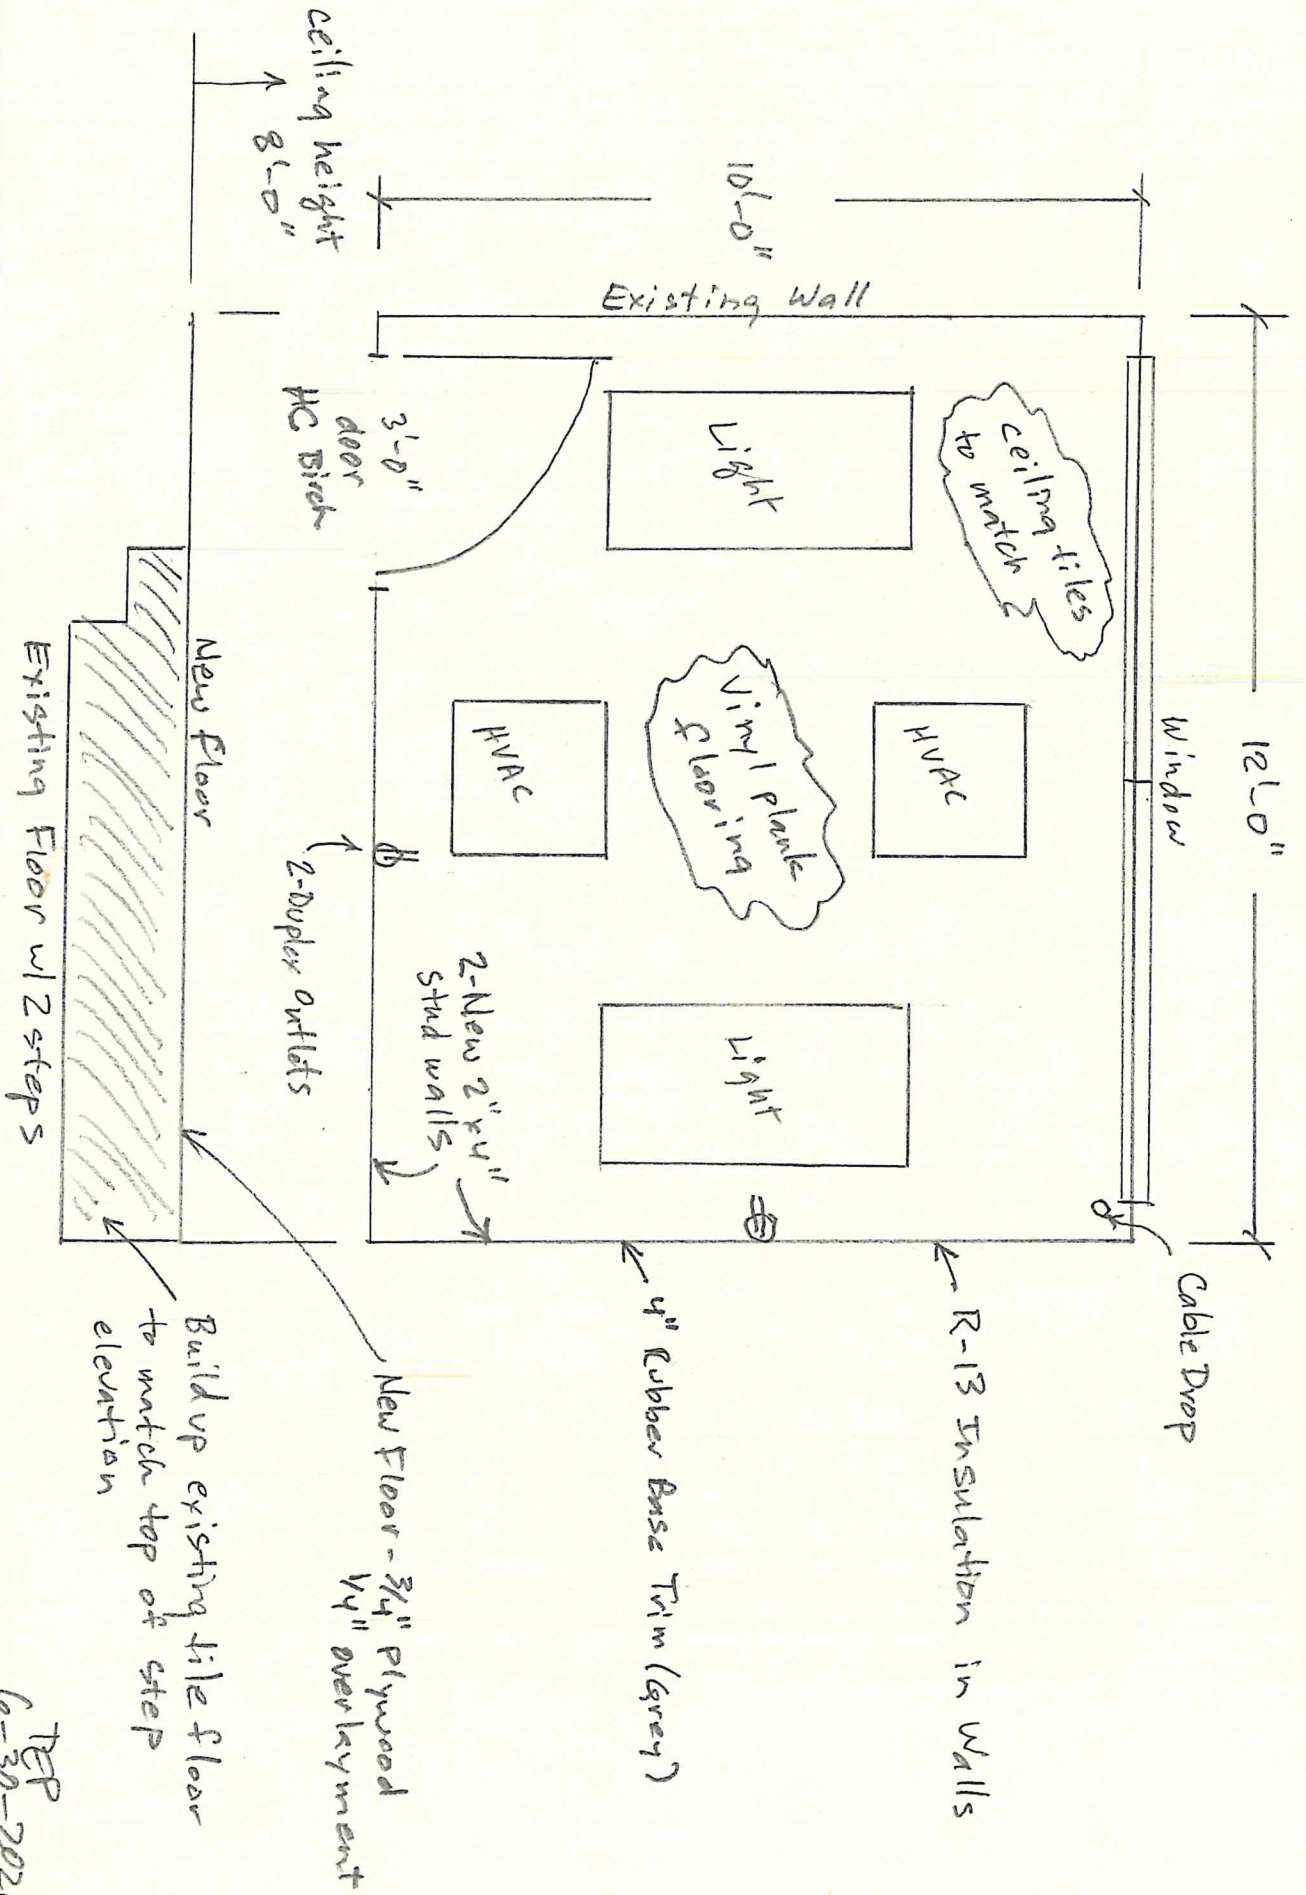

TRP
6-30-2020